QUALITY, VALUE, BEAUTY, DONGZHENG PRODUCTS



FLOORING

PRODUCT GUIDE

LVT · WPC · SPC · LAMINATE

KBS FLOOR&DECO

JIANGSU DONGZHENG NEW DECORATION MATERIALS CO., LTD.(LVT/WPC/SPC)

JIANGSU GUANGYU DECORATIVE MATERIALS CO., LTD.(LAM)

ADD: HENGLIN TOWN,WUJIN, CHANGZHOU,JIANGSU 213103

TEL: +86-519-88496821 FAX: +86-519-88496820

WWW.KBSFLOOR.COM

KBS FLOOR&DECO



LVT

04



WPC

16



SPC

28



LAMINATE

32



OTHERS

40









Company introduction

Jiangsu Dongzheng Decoration Materials Co.,Ltd. and Jiangsu Guangyu Decorative Materials Co., Ltd. are professional manufacturers of LVT,WPC,SPC,Laminate Flooring and accessories since 2003 . We situate in the biggest production center of flooring -Changzhou,Jiangsu, China.


We cover an area of 70,000 square meters, and have 7 production lines, two lines were imported from Germany. With an annual production of 4 million square meters flooring. We become a leading flooring manufacturer with good reputation. After our efforts for many years, We have not only set up a sound domestic selling market but also overseas market with products sold to more than thirty countries and regions. We achieved certain shares both in domestic and overseas markets.

We have a great capacity in terms of research and development of new products so that there are new products coming into the market every seaeon.

Welcome all of the customers home and abroad to pay your visits to us so as to get more information about the new products.

KBS Floor & Deco
Luxury Vinyl Plank

Layers consist of UV Coating, Wear Layer, Printed Film Layer, Center Core (optional Fiberglass) Base Backing Layer

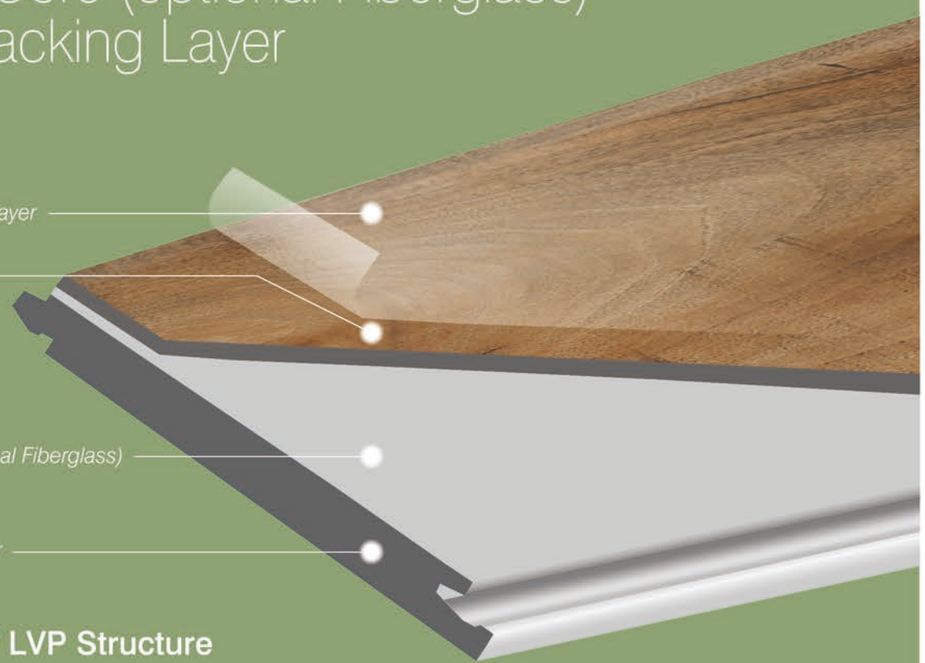

CLICK LVT / LVP Structure

Click Flooring thickness : 3.2-5.0mm
if you need, pls. kindly contact us for details
of GLUE DOWN vinyl planks structure -1.5-3.0mm


UNICLIC® PATENTED TECHNOLOGY

Water, Moisture, Drip, And Splash Resistant Vinyl Click Plank Flooring
48"/36"/60" Long Wood Look Planks
Unilin Fastening System
Easy Click Together Installation
Installs With Simple Tools
Gentle Beveled Edge
Installs Over Wood, Cement, Granite, Laminate and Other Level, Various Surfaces available
Made with a 100% Virgin Vinyl
With/without Fiberglass Reinforced Core







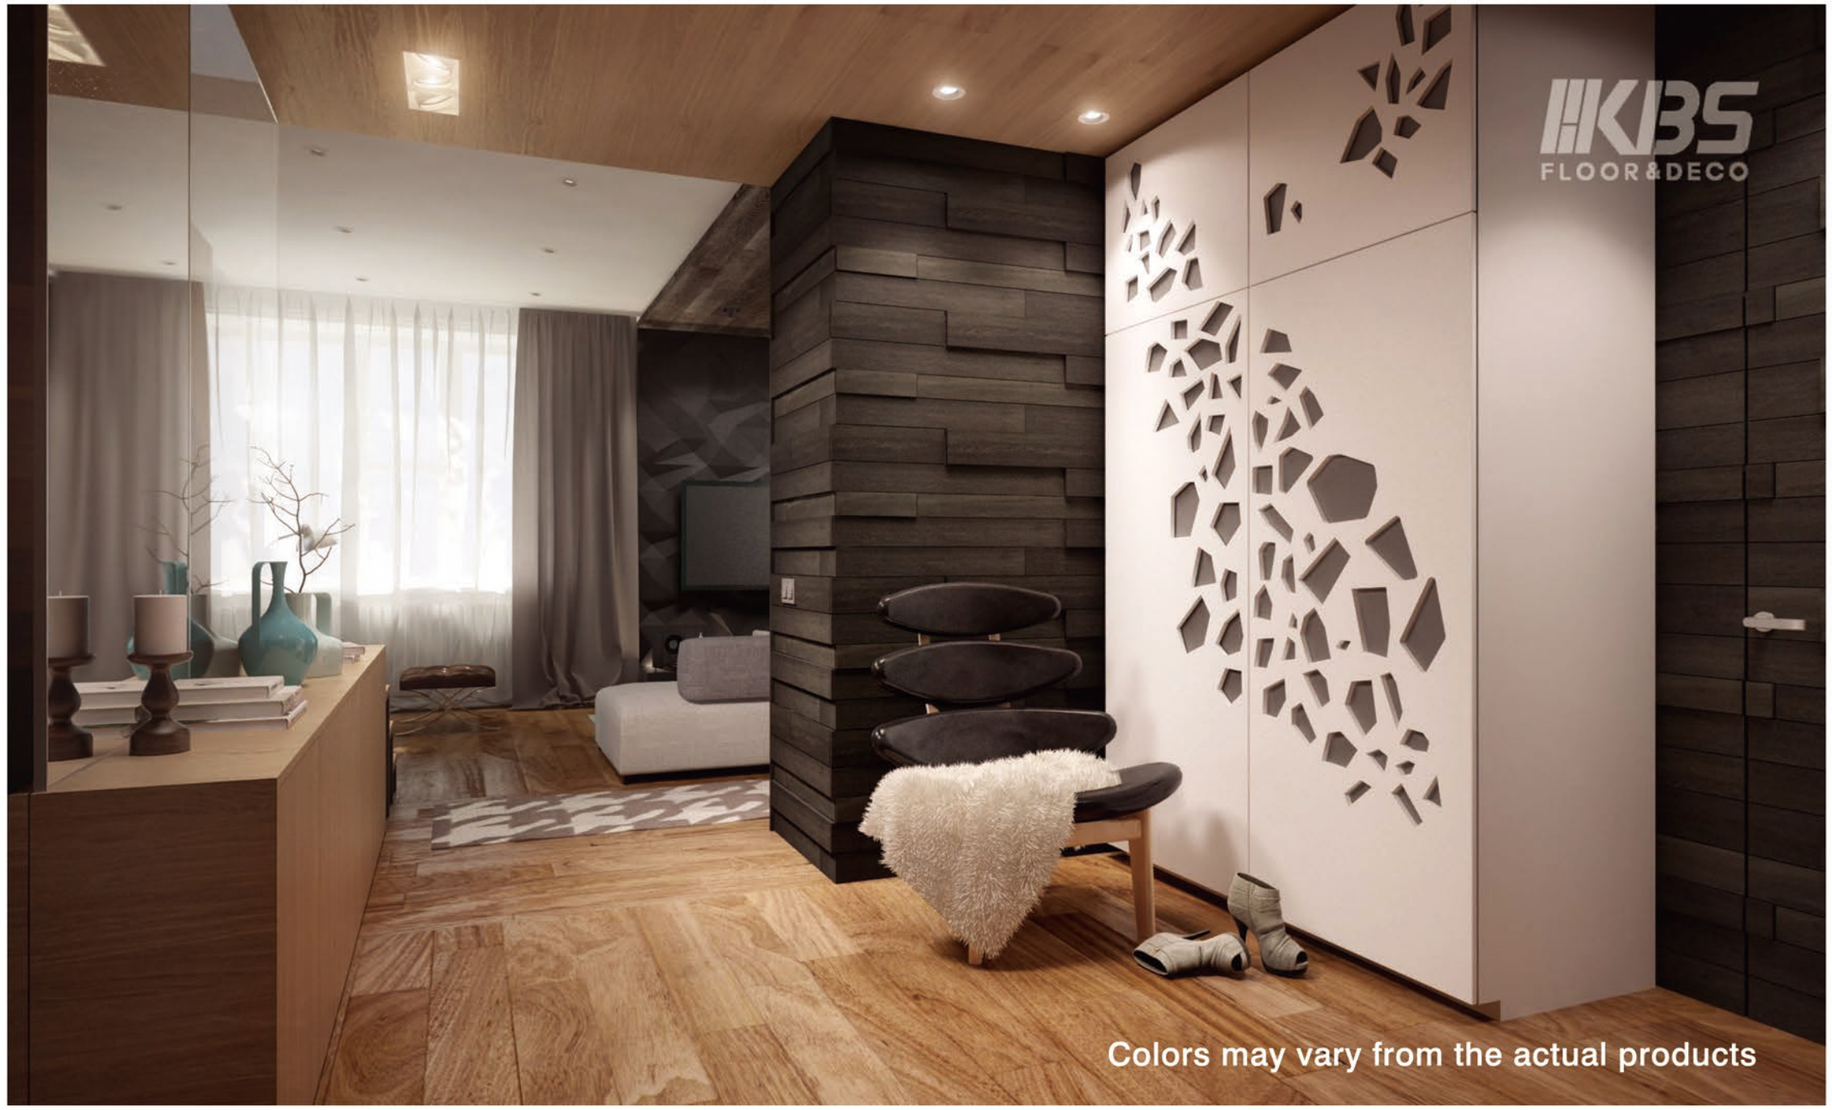







KBS FLOOR & DECO
LUXURY VINYL PLANK
QUALITY, VALUE, BEAUTY.

165

KBS FLOOR&DECO

KBS FLOOR & DECO LUXURY VINYL PLANK
QUALITY, VALUE, BEAUTY.

Favorite for everyday living / lovely to look at ,easy to care for and highly resistant to the scuffs and spills of everyday life

Normal Size: 6"x36"/48" x3.2mm 6"x36"/48"x 4mm 6"x36"/48"x 5mm

Other sizes also available , pls. contact us for more details

Colors may vary from the actual products


KBS-176L-03


KBS-176L-04


KBS-176L-08















KBS FLOOR & DECO

LUXURY VINYL PLANK

QUALITY, VALUE, BEAUTY.

(EIR FINISH AVAILABLE WITH 60"LENGTH)

190

KBS FLOOR & DECO
LUXURY VINYL PLANK
QUALITY, VALUE, BEAUTY.

Add warmth ,comfort and naturalness to all areas:
KBS is luxury for the senses and pure well-being.
Colored surfaces emphasizing the natural wood grain and texture are the latest trend.
We bring out the wood's grain pattern to best effects.
In this way, we offer you color-refined flooring with a vibrant personality.
For more details, pls. contact us.

Colors may vary from the actual products




KBS-280-1


KBS-280-4


KBS-280-5

KBS FLOOR & DECO LUXURY VINYL PLANK


QUALITY, VALUE, BEAUTY.

Colors may vary from the actual products


KBS-353-3



KBS-353-5


KBS-353-7

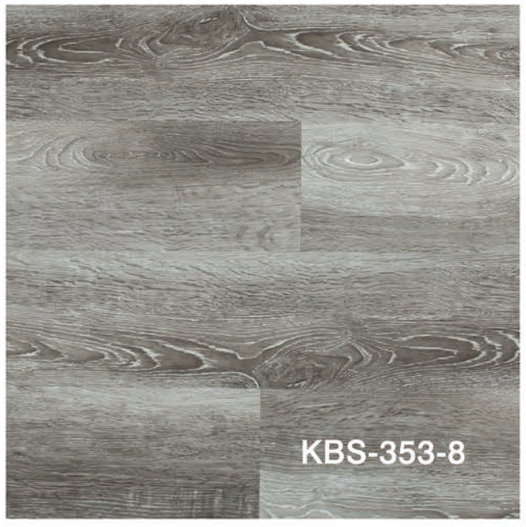
KBS-353-8

KBS Floor & Deco Engineered Vinyl Plank(WPC)

Layers consist of Vinyl Top (UV Coating, Wear Layer, Printed Film Layer and PVC Layer), WPC Core, Optional EVA/Cork (not shown in this structure)

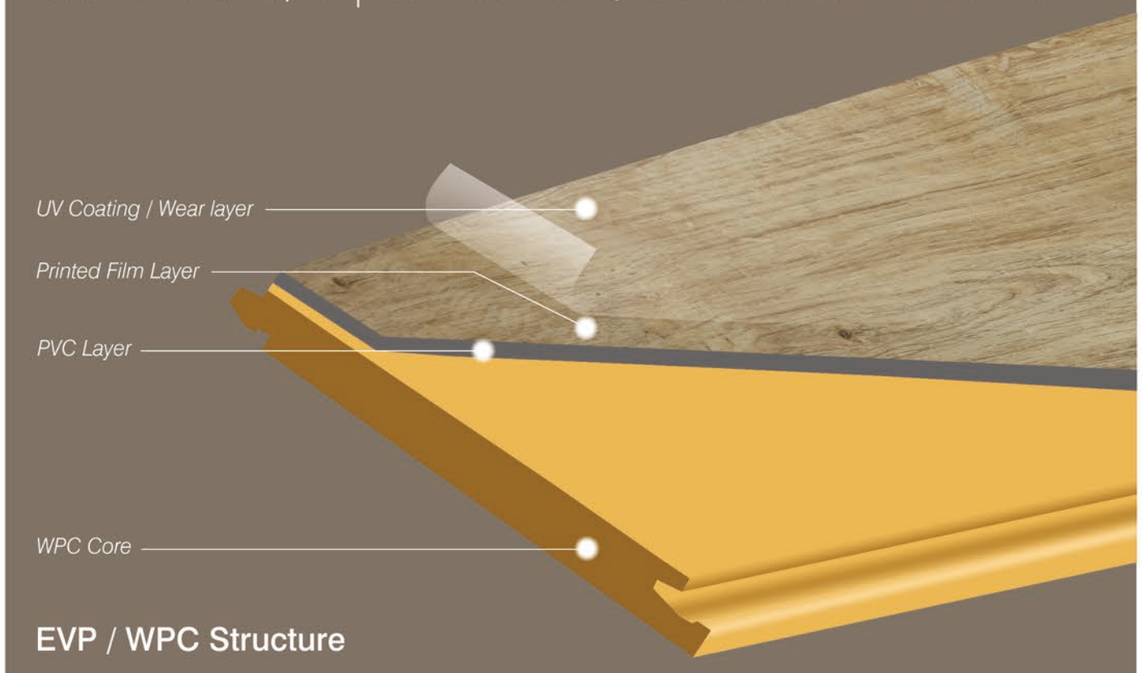

EVP / WPC Structure

Our standard : 1.5mm Vinyl Top +5.0mm WPC
other choices also available
EVA / Cork Thickness: 1.0-2.0 mm

UNICLIC® PATENTED TECHNOLOGY



Why Choose KBS Engineered Vinyl Plank (WPC)

Compared with other Normal Vinyl Planks

Absorb sound and Less Shrinkage

Water, Moisture, Drip, and Splash Resistant

Different Length Wood and Stone Look Planks

Unilin Fastening System

Easy Click Together Installation

Installs With Simple Tools

Gentle Beveled Edge

Installs Over Wood, Cement, Granite, Laminate and Other Level, Various Surfaces available

Bring the benefits to your whole life

For more details, pls. contact us.


KBS
FLOOR&DECO
KBS FLOOR & DECO
ENGINEERED VINYL PLANK(WPC)


EIR FINISH
KBS-305L-10


KBS-305L-11


KBS-305L-12


EIR FINISH
KBS-305L-01


EIR FINISH
KBS-305L-07


EIR FINISH
KBS-305L-08



KBS
FLOOR&DECO
Colors may vary from the actual products


KBS
FLOOR&DECO
KBS-315L-04
KBS FLOOR & DECO
ENGINEERED VINYL PLANK(WPC)
48"/36"/60" Long Wood and Marble Look Planks Unilin Fastening System
Easy Click Together Installation
Installs With Simple Tools Installs Over Wood, Cement, Granite,
Laminate and Other Level Various Surfaces available
Colors may vary from the actual products


KBS-315L-01


KBS-315L-02


KBS-315L-09

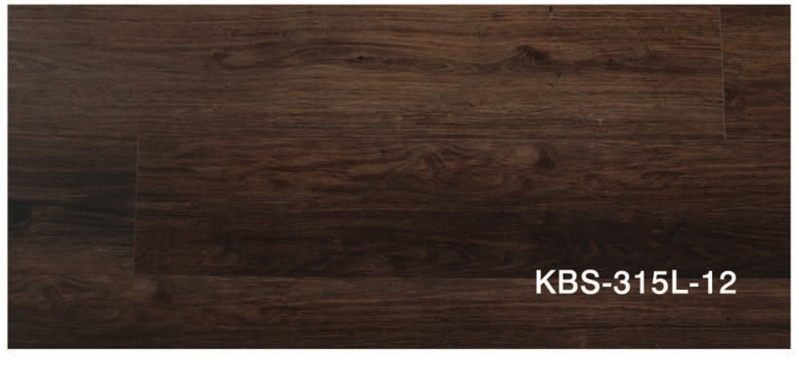
KBS-315L-12


KBS-641L-06


KBS-641L-10


KBS-641L-07


KBS-641L-10


KBS-641L-06
KBS
FLOOR&DECO
KBS FLOOR & DECO
ENGINEERED VINYL PLANK(WPC)
Colors may vary from the actual products


KBS FLOOR & DECO
ENGINEERED VINYL PLANK(WPC)
Colors may vary from the actual products
KBS
FLOOR&DECO


KBS-6172-2


KBS-6172-4


KBS-6172-6


KBS-3001L-2


KBS-3001L-3


KBS-3001L-5


KBS
FLOOR&DECO
V&S
KBS FLOOR & DECO
ENGINEERED VINYL PLANK(WPC)
Colors may vary from the actual products

KBS FLOOR & DECO ENGINEERED VINYL PLANK(WPC)

All our experiences for the most beautiful wood styles

The quiet flooring

Unilin locking system

To make floors not only looks good but also easy installation

All EIR finish make flooring looking from the original wood effects

We mainly offer the warmth and typical characteristics of this natural materials



KBS-W11-1



KBS-W12-1



KBS-W12-2



KBS-W12-3



KBS-W11-2



KBS-W11-3




KBS-W11-4



KBS-W12-4

KBS Floor & Deco SPC Flooring

Layers consist of UV Coating .Wear layer
Printed Film layer, SPC vinyl layer
Optional EVA/Cork base (not shown in this structure)

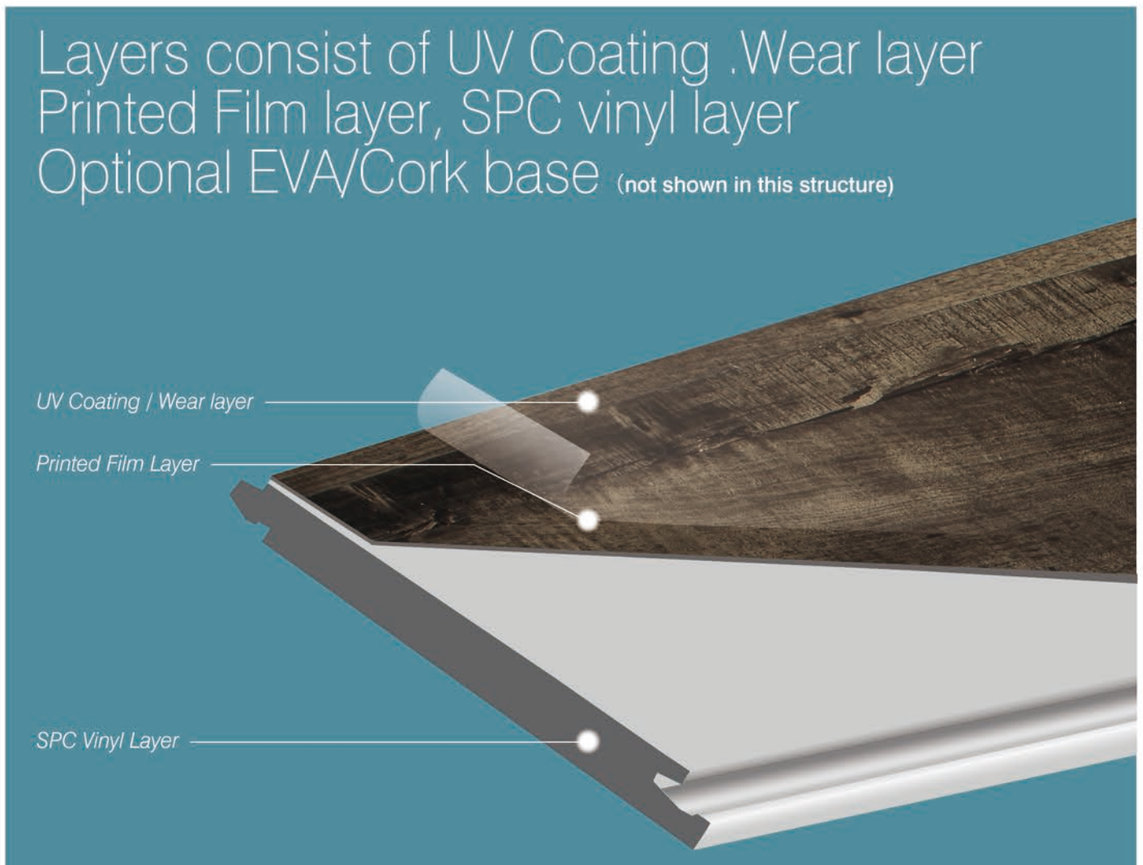

SPC Structure

Flooring Thickness: 4.0-6.0 mm

EVA / Cork Thickess: 1.0-2.0 mm

UNICLIC® PATENTED TECHNOLOGY



SPC Flooring

A new product of Luxury Vinyl Tiles.
Strong wear resistant
Unilin Fastening System
Completely safe and environment friendly for residential and public areas

Glue free ,easy installation
Less shrinkage than LVT or WPC
Bring the benefits to your whole life

For more details, pls. contact our sales




SPC FLOORING



KBS Floor & Deco Laminate Flooring

Layers consist of Overlay with special impregnation(Wear layer),Decor paper, High density flooring core, Balance Paper, optional Silent Layer. (not shown in this structure)

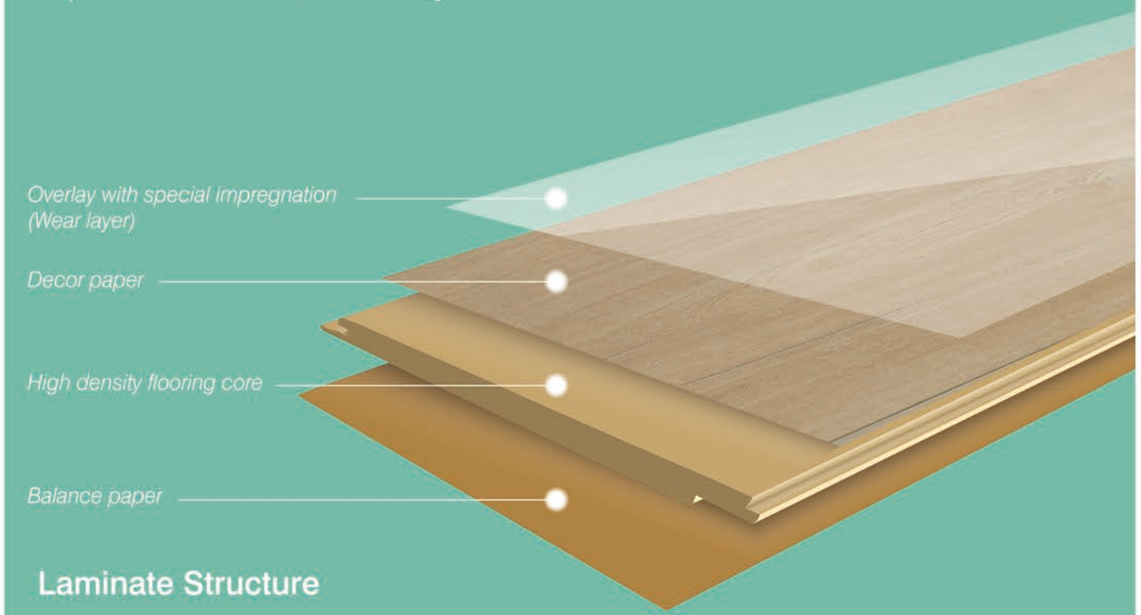

Laminate Structure

Flooring Thickness: 7.0-12.00 mm

UNICLIC® PATENTED TECHNOLOGY

KBS Floor & Deco Laminate Flooring

Ever since the very first planks Came off the KBS planks, Production line, R&D Dept. Has been continuous looking to improve the inherent Looking into the properties and make installation even easier. Today's models, for example are fitted without glue, but still enjoy all the features than first made the planks such a popular success.













EIR finish / Random Width make the looking from
the original wood effects
We mainly offer the warmth and typical characteristics
For more details,pls. contact us
Colors may vary from the actual products











EIR FINISH

Size : 1215 x 127 x 8 /12 (MM)

Only 127mm width available

Every eighteen planks repeat


For more details,pls. contact us









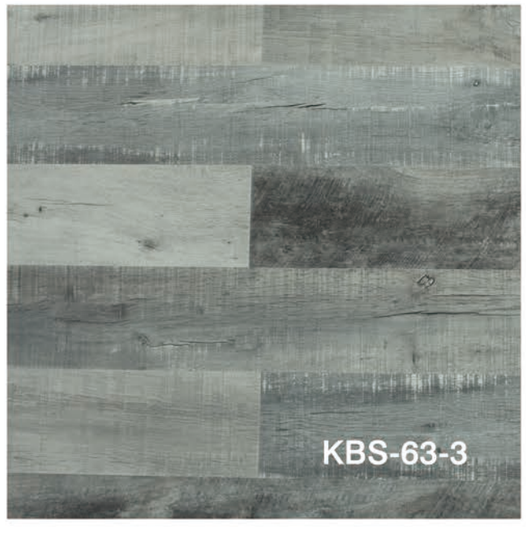





KBS FLOOR & DECO
LAMINATE FLOORING

63









KBS FLOOR & DECO

LAMINATE FLOORING

Colors may vary from the actual products

65



KBS Floor & Deco - ACCESSORIES



STAIRNOSE
SIZE: 2400X55X18mm
QTY: 10 PCS / BOX



FLUSH STAIRNOSE
SIZE: 2400X110X25mm
2400X 72 X25mm
QTY: 8 PCS / BOX



SKIRTING
SIZE: 2400X90X15mm
QTY: 8 PCS / BOX




SKIRTING
SIZE: 2400X80X15mm
QTY: 8 PCS / BOX



SKIRTING
SIZE: 2400X60X15mm
QTY: 10 PCS / BOX



REDUCER
SIZE: 2400X45X15mm
2400X45X12mm
QTY: 20 PCS / BOX



END CAP
SIZE: 2400X35X15mm
2400X35X12mm
QTY: 20 PCS / BOX



T-MOULDING
SIZE: 2400X45X10mm
2400X45X12mm
QTY: 20 PCS / BOX



QUARTER ROUND
SIZE: 2400X28X15mm
QTY: 40 PCS / BOX



CONCAVE LINE
SIZE: 2400X28X15mm
QTY: 40 PCS / BOX

More details
pls contact us

MDF

Flooring accessories

Materials : MDF

With wear layer


Plastic track included



STAIRNOSE
SIZE: 2400X53X18mm
QTY: 10 PCS / BOX




FLUSH STAIRNOSE
SIZE: 2400X110X25mm
QTY: 8 PCS / BOX



SKIRTING
SIZE: 2400X80X12mm
QTY: 10 PCS / BOX



REDUCER
SIZE: 2400X45X10mm
QTY: 20 PCS / BOX



T-MOULDING
SIZE: 2400X45X10mm
QTY: 20 PCS / BOX



END CAP
SIZE: 2400X35X10mm
QTY: 20 PCS / BOX



QUARTER ROUND
SIZE: 2400X26X15mm
QTY: 40 PCS / BOX

WPC

Flooring accessories

Materials : WPC

With wear layer

Plastic track included

INSTALLATION INSTRUCTIONS

All The Below Only for Your References

LVT / WPC / SPC

Tools Needed - Spacers, Utility Knife, Tape Measure, L Square, and if necessary, a handsaw and tools for subfloor repair/preparation

Storage and Acclimation - Store your unopened floor packages flat, horizontal, and well spread out (no more than 6 boxes high) for at least 48 hours in a room with an average temperature between 18 and 22 degrees Celcius.

Sub Floor - All subfloors must be clean, dry, structurally sound, free from deflection, and level within 3/16" per 10' radius. Any unevenness that will create empty space between the subfloor and the vinyl floor should be leveled out.

Acceptable subfloor types:

Wood - if it meets the standard criteria above, it is acceptable for use as a subfloor. Wood subfloors should not be covered with plastic and can not lay directly on concrete. Suspended floors should have at least 18" of ventilated air space above ground and a moisture barrier should be placed over crawl spaces.

Concrete - should be properly cured and allowed to dry for 60 days. Use cement compound to repair cracks and level.

Sheet and Tile Flooring – must be well bonded to sub floor, in good condition, clean and level. Do not install over multiple layers. Other tile such as ceramic may require a cement overlay to meet the level requirements mentioned above.

Carpeting and other soft or heavily cushioned material are **NOT** acceptable and must be removed.

Underlayment - Do not use a soft underlayment such as PE foam.

Radiant-Heated Subfloors: Follow the heating regulation recommendations given by the system supplier. The heating element should not come into direct contact with LVT and the maximum allowed surface temperature is 26˚C. The heating system should be running for at least 2 weeks before installation and then turn the heating down to 15˚C one week prior to installation. Do not turn off heating system if outside temperature is below freezing. Upon completion of installation, heating temperature may be increased gradually over a period of one week to the desired level.

Installation Preparations:

Floating Installation: Your floor is made to be installed floating without being glued or nail down: Use spacing wedges to leave an open expansion gap of 1/4" around the perimeter and any fixed objects. The floor must be able to move freely – do not connect or install tight to any construction part. It is always recommended to install expansion spaces at door openings.

Measure the area to be installed making sure to take the perimeter **expansion requirement** of **1/4"** into account and:

Define the Installation Direction - It is recommended to install the length direction of the planks parallel to the main light direction. In narrow hallways, install the floor parallel to the length way.

Calculate the Length of the Last Plank in the First Row **-** if you determine the last plank in the first row is less than 11" long, cut your first plank to allow for the last plank to be 11".

Calculate the Width of the Last Row - If the last row will be less than 2" wide, cut 2" off the width of the first row before installing to ensure the stability of the floor.

Remove any existing base, shoe mold or doorway thresholds.

Saw off the bottoms of doorjambs and trim so that the flooring can be slipped under. To do this, use a scrap piece of flooring as a guide and with a hand saw cut off the jamb and trim.

Special Installation - Horizontal

Cut off the locking element with a chisel, put white glue (PVAc) on the adjusted strip and push the planks horizontally together. If necessary place some spacers between last board and the wall during the hardening time of the glue. This method can also be applied to the short ends.

After the Installation

- Remove expansion spacers and install or reinstall base and/or quarter round moldings to cover the expansion space by **nailing to the wall, not the floor**.
- Install any transition pieces that may be needed (reducers, T-moldings, etc.). **Do not attach moldings to the newly installed floor.**
- Although ------ LVT floors are waterproof, it is possible for moisture to reach the subfloor by seeping through the cracks at the edge of a room. This is especially true around bathtubs and other areas where splashing is likely. To prevent this from happening in these areas, caulk around the perimeter of the installation with 100% Silicone.

Cleaning and Maintenance

- The floor should be cleaned regularly using a vacuum-cleaner (without beater brush) and/or broom.
- Spills should be cleaned up immediately.
- If required, mop with a damp mop and an approved vinyl floor cleaner according to directions. **Do not use** general purpose household cleaners, detergents, oils, soaps, 'mop & shine' products, wax, solvent-based polishes, or abrasive materials as these may damage and/ or dull the finish of the floor.
- Keep pets' nails trimmed to minimize damage to the floor
- Rugs at entrance areas will help protect against sand and dirt. **Do not use** rubber or latex backed mats or rugs. Coco fiber mats can also stain or damage the surface of your floor and should not be used.
- Non-staining felt pads should be attached to furniture legs to avoid marking. Rolling casters are not recommended.
- Use shades or blinds to minimize the floor's exposure to direct sunlight.
- Household temperatures should be maintained between 65-85 degrees Fahrenheit at all times.
- Sharp objects can damage the floor
- Do not slide heavy furniture or appliances across floor. Use something solid that will not move such as plywood as a runway, even when using a dolly or if the appliance has wheels.

Warranty

Luxury Vinyl Tile warrants that your LVT flooring will not contain manufacturing defects and further warrants that under normal residential traffic conditions and use it's LVT products will not delaminate, rip, fade, stain, or wear through for **25 years. If there is any question about the suitability of this products intended use, consult technical services department. Luxury Vinyl Tile is for indoor use only. This warranty does not cover wear or damage due to improper installation, cleaning, care or maintenance in a manner contrary to the instructions as provided by the manufacturer, physical abuse to or misuse of the product, accidents causing scratching, impact or cutting, freight damage, modification, alternations of either chemical or physical characteristics, repair or service of the product other than that per -formed by an authorized dealer, or any wear or damage caused by acts of God.** If Fortune accepts a claim under warranty, it will repair or replace at its option, the affected flooring material. This warranty covers repair and replacement of affected materials only; it does not cover associated labor costs. This warranty is non transferrable and extends only to the original owner/purchaser of the product and at the location of the original installation.